

(19) 日本国特許庁 (J P)

(12) 公開特許公報 (A)

(11) 特許出願公開番号

特開平11-177930

(43) 公開日 平成11年(1999) 7月2日

(51) Int.Cl.<sup>9</sup>

識別記号

F I

H 0 4 N 5/92  
5/225  
5/765

H 0 4 N 5/92  
5/225  
5/91

D  
F  
L

審査請求 未請求 請求項の数10 O L (全 6 頁)

(21) 出願番号 特願平9-346816

(22) 出願日 平成9年(1997)12月16日

(71) 出願人 000002185

ソニー株式会社

東京都品川区北品川6丁目7番35号

(72) 発明者 外村 雅治

東京都品川区北品川6丁目7番35号 ソニー株式会社内


(74) 代理人 弁理士 小池 晃 (外2名)

(54) 【発明の名称】 ビデオカメラ及びその制御方法

(57) 【要約】

【課題】 フィルタ特性やディレイ量等を変えることなく、また記録系と再生系とのタイミング同期用回路も複雑化させずに、簡単且つ容易に時間軸変換を実現する。

【解決手段】 CCDイメージャ1にて撮像した画像信号を記録再生部3にて記録再生すると共に、映像の時間軸伸張又は圧縮を行い得るビデオカメラであり、CCDイメージャ1の駆動信号及び記録タイミング信号を発生する記録タイミングジェネレータ5を有し、この記録タイミングジェネレータ5は、CCDイメージャ1からの画像信号の読み出し及び該画像信号の記録時のタイミングを、1フィールド単位のパケットとして扱うと共に、当該パケット内のデータレートを1倍速のレートに一定化させる。

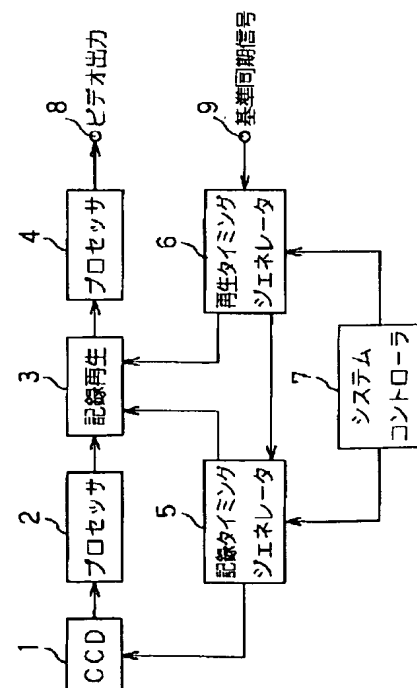

## 【特許請求の範囲】

【請求項 1】 撮像素子にて撮像した画像信号の記録再生を行うと共に、映像の時間軸伸張又は圧縮を行い得るビデオカメラであって、

上記撮像素子の駆動信号及び記録時のタイミング信号を少なくとも発生するタイミング発生手段を有し、当該タイミング発生手段は、上記撮像素子からの画像信号の読み出し及び当該画像信号の記録時のタイミングを、1フィールド単位の packets として扱うと共に、当該 packets 内のデータレートを一定化させることを特徴とするビデオカメラ。

【請求項 2】 上記タイミング発生手段は、上記撮像素子へのセンサゲートパルスから 1フィールドのラインシフト終了までの間を上記 packets として発生し、上記記録時と再生時のタイミングを同一の基準クロックから生成することを特徴とする請求項 1 記載のビデオカメラ。

【請求項 3】 上記タイミング発生手段は、上記 packets 内のデータレートを 1 倍速に一定化させることを特徴とする請求項 1 記載のビデオカメラ。

【請求項 4】 上記タイミング発生手段は、記録した画像信号の再生時のタイミング信号をも発生し、上記記録時と再生時のタイミングを同一の基準クロックから生成することを特徴とする請求項 1 記載のビデオカメラ。

【請求項 5】 交流点灯照明下での撮影の際に、上記タイミング発生手段は上記 1フィールド単位の packets のタイミングを当該交流点灯照明の電源周波数と同期させることを特徴とする請求項 1 記載のビデオカメラ。

【請求項 6】 撮像素子にて撮像した画像信号の記録再生を行うと共に、映像の時間軸伸張又は圧縮を行い得るビデオカメラの制御方法であって、

上記撮像素子からの画像信号の読み出し及び当該画像信号の記録時のタイミングを、1フィールド単位の packets として扱い、当該 packets 内のデータレートを一定化することを特徴とするビデオカメラの制御方法。

【請求項 7】 上記 packets は、上記撮像素子へのセンサゲートパルスから 1フィールドのラインシフト終了までの間であることを特徴とする請求項 6 記載のビデオカメラの制御方法。

【請求項 8】 上記 packets 内で一定化するデータレートは 1 倍速のデータレートに対応することを特徴とする請求項 6 記載のビデオカメラの制御方法。

【請求項 9】 上記記録再生のタイミングは同一の基準クロックから生成することを特徴とする請求項 6 記載のビデオカメラの制御方法。

【請求項 10】 交流点灯照明下での撮影の際には、上記 1フィールド単位の packets のタイミングを、当該交流点灯照明の電源周波数と同期させることを特徴とする請求項 6 記載のビデオカメラの制御方法。

## 【発明の詳細な説明】

## 【0001】

【発明の属する技術分野】 本発明は、画像信号の記録再

生が可能であると共に映像の時間軸伸張又は圧縮を行い得るビデオカメラ及びその制御方法に関する。

## 【0002】

【従来の技術】 従来より、動画像からなるコマーシャル映像や映像芸術作品における、被写体の質感を演出するための一手法として、スローモーションに代表される時間軸変換法がある。

【0003】 従来、この時間軸変換は、フィルムカメラによって映写時のフィールドレートと異なるレートで撮影することにより行われていた。すなわち、撮影時に例えば映写時のフィールドレートよりも速いレートで撮影を行い、映写時には通常のフィールドレートでの映写を行うようにすると、当該映写時にはスローモーション映像が得られることになる。なお、このようなスローモーション映像は、現実の映像時間軸よりも時間軸が伸張した映像と言える。

【0004】 しかし、このフィルムカメラによる時間軸変換の方式では、撮影したフィルムを現像しない限り、演出の効果が確認できなく、即時性が無いという欠点がある。

## 【0005】

【発明が解決しようとする課題】 これに対して、例えばビデオカメラにおいて時間軸変換を実現できれば、磁気的、電気的な即時性のある記録再生が可能な記録媒体を用いることができるので、演出の効果を、撮影後直ちに確認できることになる。

【0006】 しかし、一般的に、ビデオカメラは、NTSC (National Television System Committee) や PAL (Phase Alternation by Line)、SECAM (sequential a memoire color television system) 等の現行放送フォーマットに従うため、フレームレートが 30 或いは 25 フレーム毎秒に固定されているものが殆どである。例外として、基準となるフレームレートの整数倍速を実現するビデオカメラも存在するが、映像の質感の演出という点においては表現の自由度が乏しい。

【0007】 ここで、ビデオカメラにおいて、映像の映像の時間軸の伸張や圧縮を例えば記録系の基準クロックを変えることによって実現しようすると、

(1) 映像信号帯域が変わるため、フィルタの特性を変える必要がある。

(2) ディレイラインを用いて、タイミング調整をしている回路のディレイ量を変える必要がある。

(3) 再生系とのタイミング同期回路が複雑になる。といった欠点があった。

【0008】 そこで、本発明は、上述した実情に鑑みてなされたものであり、フィルタ特性やディレイ量等を変えることなく、また記録系と再生系とのタイミング同期回路も複雑化させずに、簡単且つ容易に時間軸変換を可能とするビデオカメラ及びその制御方法を提供することを目的とする。

## 【0009】

【課題を解決するための手段】本発明のビデオカメラ及びその制御方法は、撮像素子からの画像信号の読み出し及び当該画像信号の記録時のタイミングを、1フィールド単位の packets として扱い、当該 packets 内のデータレートを一定化することにより、上述した課題を解決する。

【0010】本発明によれば、packets 内のデータレートは例えば1倍速に対応するデータレートに一定化するが、packets 毎のレートすなわちフィールドレートを任意に変更可能にしている。このため、任意のフィールドレートを信号処理回路に変更を加えることなく実現可能となっている。

## 【0011】

【発明の実施の形態】以下、本発明の好ましい実施の形態について、図面を参照しながら説明する。

【0012】図1に、本発明のビデオカメラ及びその制御方法が適用される一実施の形態のビデオカメラの全体構成を示す。

【0013】この図1において、CCD (Charge Coupled Device) イメージャ1は、図示しない光学系によって受光面上に結像された被写体等の像を光電変換により画像信号に変換する。このCCDイメージャ1での光電変換により生成された画像信号は、プロセッサ回路2に送られる。このプロセッサ回路2では、CCDイメージャ1からの画像信号に所定の映像信号処理を施す。なお、このプロセッサ回路2における所定の映像信号処理は、通常のビデオカメラにて行われるものであり、周知であるためここではその説明を省略する。当該プロセッサ回路2にて映像信号処理を受けた画像信号は、記録媒体として例えばRAM (Random Access Memory)、ハードディスク、ビデオテープ等の何れか若しくはそれらの組み合わせを備える記録再生部3に送られて記録される。本実施の形態において、上記CCDイメージャ1の駆動タイミングと記録再生部3における画像信号の書き込みタイミングは、3倍速以下の任意のフレームレートにすることができ、記録タイミングジェネレータ5が管理する。

【0014】一方で、再生タイミングジェネレータ6には、図示しない同期信号発生回路から端子9を介して供給された基準同期信号が入力される。上記記録再生部3に記録されている画像信号は、当該基準同期信号に同期して、再生タイミングジェネレータ6で管理された再生タイミングにより1倍速のフレームレートで再生され、プロセッサ回路4に送られる。このプロセッサ回路4では、記録再生部3から供給された信号に所定の信号処理を施し、得られた画像信号がビデオ出力端子8から後段に出力される。なお、このプロセッサ回路4における所定の映像信号処理は、通常のビデオカメラにて行われるものであり、周知であるためここではその説明を省略す

る。

【0015】システムコントローラ7は、各部の制御を行うと共に、上記記録タイミングジェネレータ5と再生タイミングジェネレータ6の同期制御を行う。

【0016】上述のように、上記CCDイメージャ1の駆動タイミングと記録再生部3の書き込みタイミングを3倍速以下の任意のフレームレートにし、一方で、記録再生部3からの再生時を1倍速のフレームレートにすることで、映像の時間軸変換が行われることになる。すなわち例えば、上記CCDイメージャ1の駆動タイミングと記録再生部3の書き込みタイミングを3倍速のフレームレートにし、記録再生部3からの再生時を1倍速のフレームレートにすると、ビデオ出力端子8から後段に出力される画像は3倍に時間軸が伸張されたスローモーション映像となる。

【0017】図2には、例えばNTSC方式のような525ライン/60フィールド毎秒のシステムに、上記時間軸変換を実現する本実施の形態のビデオカメラを適用した場合の、上記記録タイミングジェネレータ5からCCDイメージャ1に送られる各種CCD駆動信号のタイミングチャートを示す。図2中のVDはCCDイメージャ1の垂直駆動パルスを、V1、V2、V3、V4は垂直レジスタ転送クロックを、CGはセンサゲートパルスを、FPは後述するフィールド packets を、ELは有効ラインを示し、図2(a)はオッドフィールド(奇数フィールド)のタイミングチャートを、図2(b)にはイーブンフィールド(偶数フィールド)のタイミングチャートを示している。

【0018】ここで、この図2に示すようなCCD駆動タイミングに対して、CCD駆動のスピードを例えば通常の3倍とする。具体的に言うと、CCDイメージャ1のセンサゲートパルスCGから、1フィールドのラインシフト終了までのタイミングをフィールド packets FPとして、奇数偶数(オッド、イーブン)の2種類のフィールド packets FPを開始するタイミングを制御することで、3倍速以下の可変フレームレートを実現することができる。

【0019】すなわち、CCDイメージャ1の水平垂直駆動を、例えば通常の3倍速でコンスタントに行い、センサゲートパルスCGを立てる周期を、図3の表及び図4に示すように、所望のフィールドレートに応じて変えることにより、3倍速以下、例えば1倍速、1.5倍速、2倍速、2.5倍速、3倍速等のスピードでの撮影や、更に1倍速以下、例えば0.5倍速等のスピードでの撮影が可能となる。なお、図3には、フィールドレートと packets 周期の対応表を示しており、例えばフィールドレートが30フィールド/秒(すなわち0.5倍速)のときの packets 周期は3150ライン/フレーム、フィールドレートが45フィールド/秒(すなわち0.75倍速)のときの packets 周期は2100ライン

／フレーム、フィールドレートが60フィールド／秒（すなわち1倍速）のときのパケット周期は1575ライン／フレーム、・・・となり、以下同様に、フィールドレートが150フィールド／秒（すなわち2.5倍速）のときのパケット周期は630ライン／フレーム、フィールドレートが180フィールド／秒（すなわち3倍速）のときのパケット周期は525ライン／フレームとなる。また、図4（a）にはフィールドレートが180フィールド／秒（すなわち3倍速）のとき、図4（b）には90フィールド／秒（すなわち1.5倍速）のとき、図4（c）には60フィールド／秒（1倍速）のときのセンサゲートパルスCGとフィールドパケット周期のタイミングを示している。

【0020】上述のように、本実施の形態によれば、フィールドパケットFPという概念を採用し、センサゲートパルスCGを立てる周期を所望のフィールドレートに応じて変えることにより、映像の時間軸を伸張或いは圧縮することができる。

【0021】また、本実施の形態によれば、フレームレートが変化しても、フィールドパケットFP内ではCCD水平駆動周波数を常に一定化しているため、映像周波数帯域やサンプルホールドのタイミング等、画質に影響するアナログ信号処理回路に変更は必要無く、したがって安定した映像が得られる。アナログ信号処理回路については後述する。

【0022】さらに、本実施の形態によれば、記録再生部3に対する書き込み及び読み出しタイミングが同一の基準クロックから作られ、フィールドレートが変わっても水平タイミングは不変なので、ライン単位の変更のみで対応でき、同期系が単純である。

【0023】その他、例えば蛍光灯等の交流点灯照明下で、商用電源周波数（日本国では60Hz或いは50Hz）の1倍或いは2倍程度のスピード撮影を行う場合には、低い周波数でのフリッカが目立つことになるが、本実施の形態のビデオカメラにおいては、記録系のフィールドタイミングを商用電源周波数に同期させることにより、フリッカを無くすることができる。

【0024】図5には、アナログ信号処理回路の一構成例を示す。

【0025】この図5において、CCDイメージャ11から出力された画像信号は、サンプルホールド回路12に送られる。当該サンプルホールド回路12では、アナログ画像信号を標本化して保持し、その標本化して保持

した画像信号をシェーディング補償回路13に送る。これらCCDイメージャ11及びサンプルホールド回路12は、CCDドライブタイミングジェネレータ17からのタイミング信号に基づいて動作する。

【0026】シェーディング補償回路13は、H、V近似鋸波ジェネレータ18から供給された水平及び垂直の走査に同期した近似鋸波を、サンプルホールド回路12からの画像信号に重畳するシェーディング補償（補正）処理を行う。

【0027】シェーディング補償回路13から出力された画像信号は、ローパスフィルタ（LPF）にて高調波ノイズ成分が除去された後、アナログ／デジタル（A/D）コンバータ15にてデジタル画像データに変換される。この画像データは出力端子16から後段の構成に送られる。

【0028】

【発明の効果】本発明においては、撮像素子からの画像信号の読み出し及び当該画像信号の記録時のタイミングを、1フィールド単位のパケットとして扱い、当該パケット内のデータレートを一定化することにより、フィルタ特性やディレイ量の信号処理回路に変更を加えることなく、また記録系と再生系のタイミング同期用回路も複雑化させずに、簡単且つ容易に時間軸変換が可能である。

【図面の簡単な説明】

【図1】本発明実施の形態のビデオカメラの概略構成を示すブロック回路図である。

【図2】525ライン／60フィールド毎秒のシステムに、本実施の形態のビデオカメラを適用した場合のCCD駆動信号のタイミングチャートである。

【図3】フィールドレートとパケット周期の対応表を示す図である。


【図4】3倍速、1.5倍速、1倍速撮影のときのセンサゲートパルスとフィールドパケット周期のタイミングを示すタイミングチャートである。

【図5】アナログ信号処理回路の一構成例を示すブロック回路図である。

【符号の説明】

1 CCDイメージャ、 2, 4 プロセッサ回路、  
3 記録再生部、 5 記録タイミングジェネレータ、  
6 再生タイミングジェネレータ、 7 システムコントローラ


【図1】

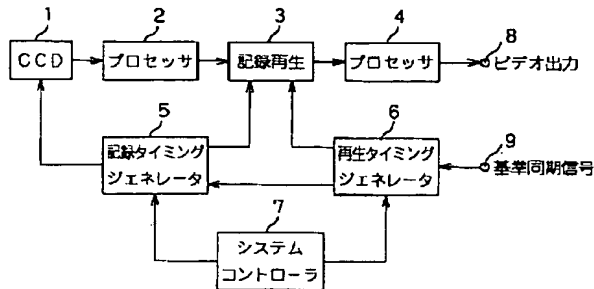


【図3】

フィールド/秒	ライン/フレーム
30	3150
45	2100
60	1575
75	1260
90	1050
100	945
125	756
150	630
180	525


【図2】

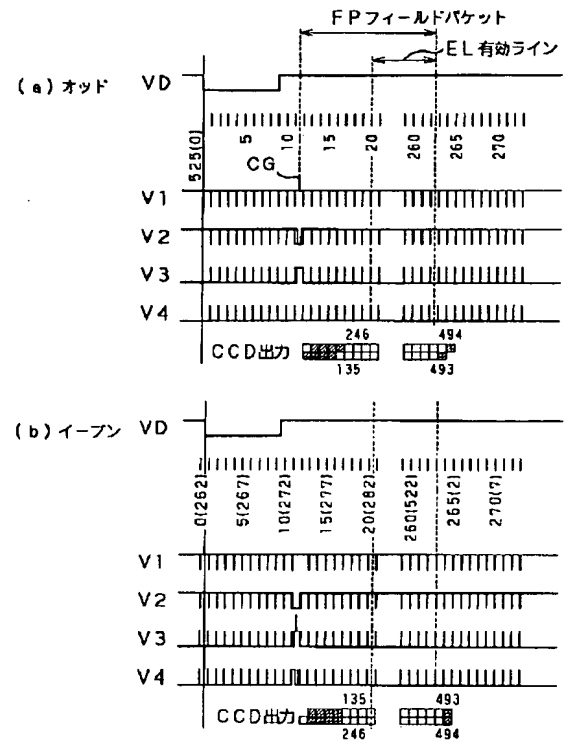

【図4】

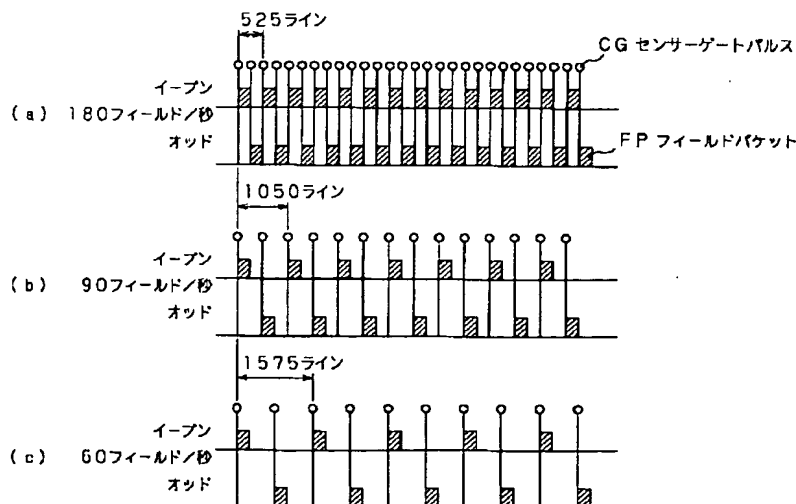

【図 5】

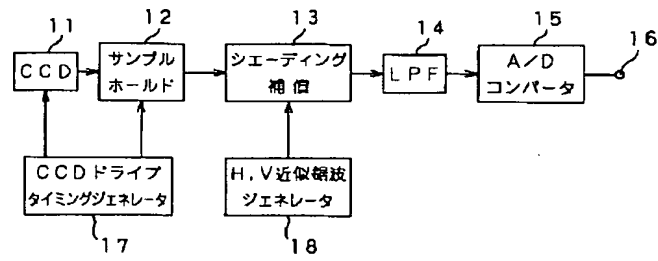

PATENT ABSTRACTS OF JAPAN

(11)Publication number : 11-177930

(43)Date of publication of application : 02.07.1999

-----  
(51)Int.Cl. H04N 5/92

H04N 5/225

H04N 5/765

-----  
(21)Application number : 09-346816 (71)Applicant : SONY CORP

(22)Date of filing : 16.12.1997 (72)Inventor : TONOMURA MASA HARU

-----  
(54) VIDEO CAMERA AND ITS CONTROL METHOD

(57)Abstract:

PROBLEM TO BE SOLVED: To simply and easily realize time base conversion without changing a filter characteristic and a delay amount or the like and without making a timing synchronization circuit of the recording system and the reproduction system complicated.

SOLUTION: An image signal photographed by a CCD imager 1 is recorded/ reproduced by a recording and reproducing section 3 and time expansion or compression of the video image is conducted in this video camera. The camera is provided with a recording timing generator 5 that generates a drive signal for the CCD imager 1 and a recording timing signal. The recording timing generator 5 processes a timing at reading of the image signal from the CCD imager 1 and at recording of the image signal as a packet in the unit of fields so as to make a data rate in the packet constant to be an unmagnified

rate.

.....  
LEGAL STATUS [Date of request for examination] 29.10.2003

[Date of sending the examiner's decision of rejection]

[Kind of final disposal of application other than the examiner's decision of rejection or application converted registration]

[Date of final disposal for application]

[Patent number] 3820716

[Date of registration] 30.06.2006

[Number of appeal against examiner's decision of rejection]

[Date of requesting appeal against examiner's decision of rejection]

[Date of extinction of right]

\* NOTICES \*

JPO and NCIPi are not responsible for any damages caused by the use of this translation.

1. This document has been translated by computer. So the translation may not reflect the original precisely.



2.\*\*\*\* shows the word which can not be translated.

3.In the drawings, any words are not translated.

---

## CLAIMS

---

[Claim(s)]

[Claim 1] While performing record playback of the picture signal picturized with the image sensor, it is the video camera which can perform time-axis elongation or compression of an image. It has a timing generating means to generate the driving signal of the above-mentioned image sensor, and the timing signal at the time of record at least. The timing generating means concerned The video camera characterized by making the data rate in the packet concerned fixed-ize while treating the timing at the time of read-out of the picture signal from the above-mentioned image sensor, and record of the picture signal concerned as a packet of 1 field unit.

[Claim 2] The above-mentioned timing generating means is a video camera according to claim 1 characterized by making the between from the sensor gate pulse to the above-mentioned image sensor to the Rhine shift termination of the 1 field into the above-mentioned packet.

[Claim 3] The above-mentioned timing generating means is a video camera according to claim 1 characterized by making 1X fixed-ize the data rate in the above-mentioned packet.

[Claim 4] The above-mentioned timing generating means is a video camera according to claim 1 characterized by also generating the timing signal at the time of playback of the recorded picture signal, and generating the timing at the time of the above-mentioned record and playback from the same reference clock.

[Claim 5] It is the video camera according to claim 1 characterized by the above-mentioned timing generating means synchronizing the timing of the packet of the 1 above-mentioned field unit with the power line period of the alternating current lighting lighting concerned in the case of the photography under alternating current lighting lighting.

[Claim 6] The control approach of the video camera characterized by being the control approach of a video camera that time-axis elongation or compression of an image can be performed, treating the timing at the time of read-out of the picture signal from the above-mentioned image sensor, and record of the picture signal concerned as a packet of 1 field unit, and fixed-izing the data rate in the packet concerned while performing record playback of the picture signal

picturized with the image sensor.

[Claim 7] The above-mentioned packet is the control approach of the video camera according to claim 6 characterized by being from the sensor gate pulse to the above-mentioned image sensor before the Rhine shift termination of the 1 field.

[Claim 8] The data rate fixed-ized within the above-mentioned packet is the control approach of the video camera according to claim 6 characterized by corresponding to the data rate of 1X.

[Claim 9] The timing of the above-mentioned record playback is the control approach of the video camera according to claim 6 characterized by generating from the same reference clock.

[Claim 10] The control approach of the video camera according to claim 6 characterized by synchronizing the timing of the packet of the 1 above-mentioned field unit with the power line period of the alternating current lighting lighting concerned in the case of the photography under alternating current lighting lighting.

---

## DETAILED DESCRIPTION

---

[Detailed Description of the Invention]

[0001]

[Field of the Invention] It relates to the video camera which can perform time-axis elongation or compression of an image, and its control approach while record playback of a picture signal is possible for this invention.

[0002]

[Description of the Prior Art] Conventionally, there is a time-axis transformation method in the commercial image and image work of art which consist of a dynamic image represented by slow motion as a way method for directing the texture of a photographic subject.

[0003] Conventionally, this time-axis conversion was performed by taking a photograph at the field rate at the time of projection, and a different rate with a film camera. That is, when rate \*\*\*\*\* quicker than the field rate for example, at the time of projection is performed and it is made to perform projection at the usual field rate at the time of projection at the time of photography, a slow motion image will be acquired at the time of the projection concerned. In addition, such a slow motion image can be said to be the image which the time-axis elongated rather than the actual image time-axis.

[0004] However, by the method of the time-axis conversion by this film camera, unless the photoed film is developed, effectiveness of production cannot be checked and there is a fault that there is no sex instancy.

[0005]

[Problem(s) to be Solved by the Invention] On the other hand, if time-axis

conversion is realizable in a video camera, for example, since the record medium in which the record playback which has a sex magnetic and electric instancy is possible can be used, the effectiveness of production can be immediately checked after photography.

[0006] However, generally, in order that a video camera may follow the present broadcast format of NTSC (National Television SystemCommittee), PAL (Phase Alternation by Line), SECAM (sequential a memoire color television system), etc., etc., that by which the frame rate is being fixed to 30 or 25-frame per second is almost the case. the frame rate which serves as criteria as an exception -- ready -- although the video camera which realizes severalX also exists, in the point of the production of the texture of an image, an expressional degree of freedom is scarce.

[0007] Here, in a video camera, if it is going to realize elongation and compression of the time-axis of the image of an image by changing the reference clock of a recording system, in order for (1) video signal band to change, it is necessary to change the property of a filter.

(2) It is necessary using a delay line to change the amount of delay of the circuit which is carrying out timing adjustment.

(3) A timing synchronous circuit with a reversion system becomes complicated.

There was a said fault.

[0008] Then, this invention aims at offering the video camera which enables time-axis conversion simply and easily, and its control approach, without also making the circuit for a timing synchronization of a recording system and a reversion system complicate, without being made in view of the actual condition mentioned above, and changing a filter shape, the amount of delay, etc.

[0009]

[Means for Solving the Problem] The video camera and its control approach of this invention solve the technical problem mentioned above by treating the timing at the time of read-out of the picture signal from an image sensor, and record of the picture signal concerned as a packet of 1 field unit, and fixed-izing the data rate in the packet concerned.

[0010] According to this invention, although the data rate in a packet is fixed-ized to the data rate corresponding to 1X, modification of the rate, i.e., the field rate, for every packet to arbitration is enabled. For this reason, the field rate of arbitration can be realized, without adding modification to a digital disposal circuit.

[0011]

[Embodiment of the Invention] Hereafter, the gestalt of desirable operation of this invention is explained, referring to a drawing.

[0012] The whole video camera configuration of the gestalt of the 1 operation by which the video camera and its control approach of this invention are applied to drawing 1 is shown.

[0013] In this drawing 1, the CCD (Charge Coupled Device) imager 1 changes into a picture signal images, such as a photographic subject in which image formation was carried out on the light-receiving side by the optical system which is not illustrated, by photo electric conversion. The picture signal generated by the photo electric conversion in this CCD imager 1 is sent to the processor circuit 2. In this processor circuit 2, predetermined video-signal processing is performed to a picture signal from the CCD imager 1. In addition, predetermined video-signal processing in this processor circuit 2 is performed by the usual video camera, and since it is common knowledge, that explanation is omitted here. The picture signal which received video-signal processing in the processor circuit 2 concerned is sent and recorded on the record playback section 3 equipped with either or those combination, such as RAM (Random Access



Memory), a hard disk, and a video tape, as a record medium. In the gestalt of this operation, if drive timing of the above-mentioned CCD imager 1 and write-in timing of the picture signal in the record playback section 3 are made into the frame rate of arbitration 3X or less, they can do \*\* and the record timing generator 5 will manage them.

[0014] On the other hand, the criteria synchronizing signal supplied through the terminal 9 from the synchronizing signal generating circuit which is not illustrated is inputted into the playback timing generator 6. Synchronizing with the criteria synchronizing signal concerned, the playback timing managed with the playback timing generator 6 is reproduced by the 1X frame rate, and the picture signal currently recorded on the above-mentioned record playback section 3 is sent to the processor circuit 4. In this processor circuit 4, predetermined signal processing is performed to the signal supplied from the record playback section 3, and the acquired picture signal is outputted to the latter part from the video outlet terminal 8. In addition, predetermined video-signal processing in this processor circuit 4 is performed by the usual video camera, and since it is common knowledge, that explanation is omitted here.

[0015] A system controller 7 performs the synchronouser control of the

above-mentioned record timing generator 5 and the playback timing generator 6 while controlling each part.

[0016] As mentioned above, time-axis conversion of an image will be performed by making drive timing of the above-mentioned CCD imager 1, and write-in timing of the record playback section 3 into the frame rate of arbitration 3X or less, and making the time of the playback from the record playback section 3 into a 1X frame rate by one side. That is, if drive timing of the above-mentioned CCD imager 1 and write-in timing of the record playback section 3 are made into a 3X frame rate and the time of the playback from the record playback section 3 is made into a 1X frame rate for example, the image outputted to the latter part will turn into a slow motion image with which the time-axis was elongated 3 times from the video outlet terminal 8.

[0017] The timing chart of the various CCD driving signals sent to the CCD imager 1 at the time of applying the video camera of the gestalt of this operation which realizes the above-mentioned time-axis conversion to a system of 525 lines / 60 field per second like NTSC system from the above-mentioned record timing generator 5 is shown in drawing 2 . VD in drawing 2 shows the field packet to which CG mentions a perpendicular register transfer clock later, and,

as for FP, V1, V2, V3, and V4 mention a sensor gate pulse for the vertical driving pulse of the CCD imager 1 later, EL shows effective Rhine, and drawing 2 (a) shows the timing chart of the even field (even number field) to drawing 2 (b) for the timing chart of the od field (odd number field).

[0018] Here, speed of a CCD drive is made into 3 usual times to CCD drive timing as shown in this drawing 2 . Speaking concretely, an adjustable frame rate's 3X or less being realizable by controlling the timing which starts two kinds of field packets FP of odd number even number (the od, even) by making timing from the sensor gate pulse CG of the CCD imager 1 to the Rhine shift termination of the 1 field into the field packet FP.

[0019] Namely, as shown in the table and drawing 4 of drawing 3 , the period which performs the level vertical drive of the CCD imager 1 constantly [ usual ] at 3X, and stands the sensor gate pulse CG By changing according to a desired field rate, photography by speed, such as 3X or less, for example, 1X, 1.5X, 2X, 2.5X, and 3X, and photography by speed, such as 1 moreX or less, for example, 0.5X etc., are attained. In addition, the conversion table of a field rate and a packet period is shown in drawing 3 . A packet period in case field rates are 30 fields / second (namely, 0.5X) For example, 3150 lines/frame A packet period in

case field rates are 45 fields / second (namely, 0.75X) 2100 lines/frame A packet period in case field rates are 60 fields / second (namely, one X) 1575 lines/frame Becoming ..., in the following, a packet period in case 630 lines/frame and the field rate of a packet period in case field rates are the 150 fields / second (namely, 2.5X) are the 180 fields / second (namely, three X) becomes the same a frame in 525 lines /. Moreover, when field rates are the 180 fields / second (namely, three X), the sensor gate pulse CG at the time of 60 fields / second (one X) and the timing of a field packet period are shown in drawing 4 (a) at drawing 4 (b) at drawing 4 (c) at the time of 90 fields / second (namely, 1.5X).

[0020] As mentioned above, according to the gestalt of this operation, the time-axis of an image can be elongated or compressed by adopting the concept of the field packet FP and changing the period which stands the sensor gate pulse CG according to a desired field rate.

[0021] Moreover, according to the gestalt of this operation, within the field packet FP, even if a frame rate changes, since CCD level drive frequency is always fixed-ized, modification does not have the need in the analog signal processing circuit which influences image quality, such as timing of an image frequency band or sample hold, therefore the stable image is acquired. About an analog

signal processing circuit, it mentions later.

[0022] Furthermore, even if the writing and read-out timing to the record playback section 3 are made from the same reference clock and a field rate changes, since level timing is eternal, it can respond only by modification of the Rhine unit and a synchronous system is simple [ timing ] according to the gestalt of this operation.

[0023] Although the flicker in a low frequency will be conspicuous under alternating current lighting lighting, such as a fluorescent lamp, in addition to this when performing speed photography of a source-power-supply frequency (Japan 60Hz or 50Hz) of 1 time or about 2 times, in the video camera of the gestalt of this operation, a flicker can be lost by synchronizing the field timing of a recording system with a source-power-supply frequency.

[0024] The example of 1 configuration of an analog signal processing circuit is shown in drawing 5 .

[0025] In this drawing 5 , the picture signal outputted from the CCD imager 11 is sent to a sample hold circuit 12. In the sample hold circuit 12 concerned, an analog picture signal is sampled and held and the picture signal sampled and held is sent to the shading compensating network 13. These CCD imager 11 and

a sample hold circuit 12 operate based on the timing signal from the CCD drive timing generator 17.

[0026] The shading compensating circuit 13 performs shading compensation (amendment) processing which superimposes the approximation saw tooth wave which synchronized with the horizontal and vertical scan supplied from H and V approximation saw-tooth-wave generator 18 on a picture signal from a sample hold circuit 12.

[0027] The picture signal outputted from the shading compensating network 13 is changed into digital image data by the analog / digital (A/D) converter 15, after a higher-harmonic-wave noise component is removed by the low pass filter (LPF). This image data is sent to a latter configuration from an output terminal 16.

[0028]

[Effect of the Invention] In this invention, time-axis conversion is easily [ simply and ] possible, without also making the circuit for a timing synchronization of a recording system and a reversion system complicate, without adding modification to the digital disposal circuit of a filter shape or the amount of delay by treating the timing at the time of read-out of the picture signal from an image sensor, and record of the picture signal concerned as a packet of 1 field unit, and

fixed-izing the data rate in the packet concerned.

---

#### DESCRIPTION OF DRAWINGS

---

[Brief Description of the Drawings]

[Drawing 1] It is the block circuit diagram showing the outline configuration of the

video camera of the gestalt of this invention operation.

[Drawing 2] It is the timing chart of the CCD driving signal at the time of applying the video camera of the gestalt of this operation to the system of 525 lines / 60 field per second.

[Drawing 3] It is drawing showing the conversion table of a field rate and a packet period.

[Drawing 4] It is the timing chart which shows the sensor gate pulse at the time of 3X, 1.5X, and 1X photography, and the timing of a field packet period.

[Drawing 5] It is the block circuit diagram showing the example of 1 configuration of an analog signal processing circuit.

[Description of Notations]

1 CCD Imager 2 Four Processor Circuit 3 Record Playback Section 5 Record Timing Generator 6 Playback Timing Generator 7 System Controller



**THIS PAGE BLANK (USPTO)**

**THIS PAGE BLANK (USPTO)**

**THIS PAGE BLANK (USPTO)**

**THIS PAGE BLANK (USPTO)**

**THIS PAGE BLANK (USPTO)**

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**